

Angel Low Subwoofer



- **A series family - Lightweight**
- **Touring - Fixed installation**
- **Deployment in Vertical and Horizontal**
- **VDA18/ VDA12 Controller / Angel**

The system shall consist of a high power subwoofer driven and protected by a dedicated amplified controller.


The enclosure shall feature two 12" LF Ferrite drivers in a bass-reflex tuned enclosure with L-Vents. The long term AES handling power shall be 1000W at the nominal 4Ω impedance.

The low frequency limit shall be 40Hz. Maximum SPL shall be 137dB. Enclosure cabinet construction shall be made from first grade Baltic beech and birch plywood. The dimensions shall be Width:350mm Height:800mm Depth:400mm. The front of the enclosure shall be protected by a steel grill with anti-corrosion coating covered with acoustically neutral 3D fabric. Finish shall be available in dark grey brown pure Enclosure weight shall be 32kg.


Compatible base plate and two anti-vibration mats shall allow safe ground-stacking of the enclosure. The subwoofer shall be connected via a 4-point speakON connector.

Angel Low Technical Specification


Type	Subwoofer
Amplifier Recommend	VDA12
Frequency Response(Preset)	40Hz - 200Hz(-6dB)
Horizontal	360°
Drivers	LF: 2×12" (Ferrite)
Handling Power (AES)	LF:1000W
Maximum Peak SPL	137dB/1m
Nominal Impedance	LF: 4Ω
Connectors	2 x NL4 SpeakOn
Pin Connectors	IN = LF:+1-1 IN = MF/ HF +2-2
Height Front	800mm
Height Back	800mm
Width	350mm
Depth	400mm
Weight	32kg / 70.5lb
Handle	2 ergonomic handles
Threaded	4x M6 threaded insert
Pole socket	1x 35mm Pole socket
Material	Baltic Birch Plywood
Finish	Dark Grey
Front	Polyester powder-coated steel grill
Rigging	Steel
Protection rating	IP45

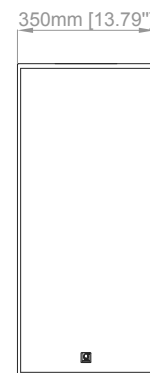

Front



Side



Top